

# Canopus



**Use Case:**  
Medium to large Enterprises

## Highlights



**Cloud Managed**  
Ray Lyte provides a multi-tier frame work to give users a controlled access through a single pane of glass. Role based admin rights available



**Easy Set-up**  
Ray Lyte supports Zero Touch Initial Account Setup experience which easy and quick. Enterprise managed through a cloud which helps in monitoring & Visualization.



**High- Speed & Sharp**  
Network is self-healing hence keeps wi-fi operating at its top. Comes with automatic data routing & software updates. Compatible with all devices including POS.



**Lower TCO**  
Ray Lyte helps enterprise save money as well as upgrade and modernize the business making a significance gain in workforce efficiency



# RAY ONE

**Ray One** is a Next Generation Solution for the challenges of today.

Ray One powers Unified Networking and Security across Networks, endpoints, and clouds in a purpose-built cloud-delivered infrastructure that scales.

It employs concepts of convergence to consolidate multiple point products including Cloud SWG, NG CASB, FWaaS, SD-WAN and ADEM, into a single integrated service provide comprehensive cybersecurity protection


for all users, devices, and applications and across all network edges. It reduces network and security complexity while increasing organizational agility and ensuring compliance, emphasizes interoperability as well as analytics, intelligence, centralized management, and automation, and integrates with a broad ecosystem of technologies and vendors.

Ray One powered Edge Gateways, Switches and Wireless (Wi-Fi) devices are available to deploy on any network edge.

## Key Specifications

SPECIFICATIONS	Conopus
AP Type	Outdoor Hardened, Wi-Fi 6 dual radio, 5 GHz 2x2 MIMO and 2.4 GHz 2x2 MIMO
MIMO	2x2 SU-MIMO 2x2 MU-MIMO
Max Aggregate Frame Rate	Max aggregate frame rate: 3.0 Gbps 2.4GHz: 600 Mbps 5GHz: 2400 Mbps
WAN/LAN	1 x 10/100/1000/2500Mbps Ethernet (RJ45) PoE 1 x 10/100/1000 BASE-T Ethernet (RJ45)
USE CASE	General Purpose Fits most Outdoor use case

## Core Components

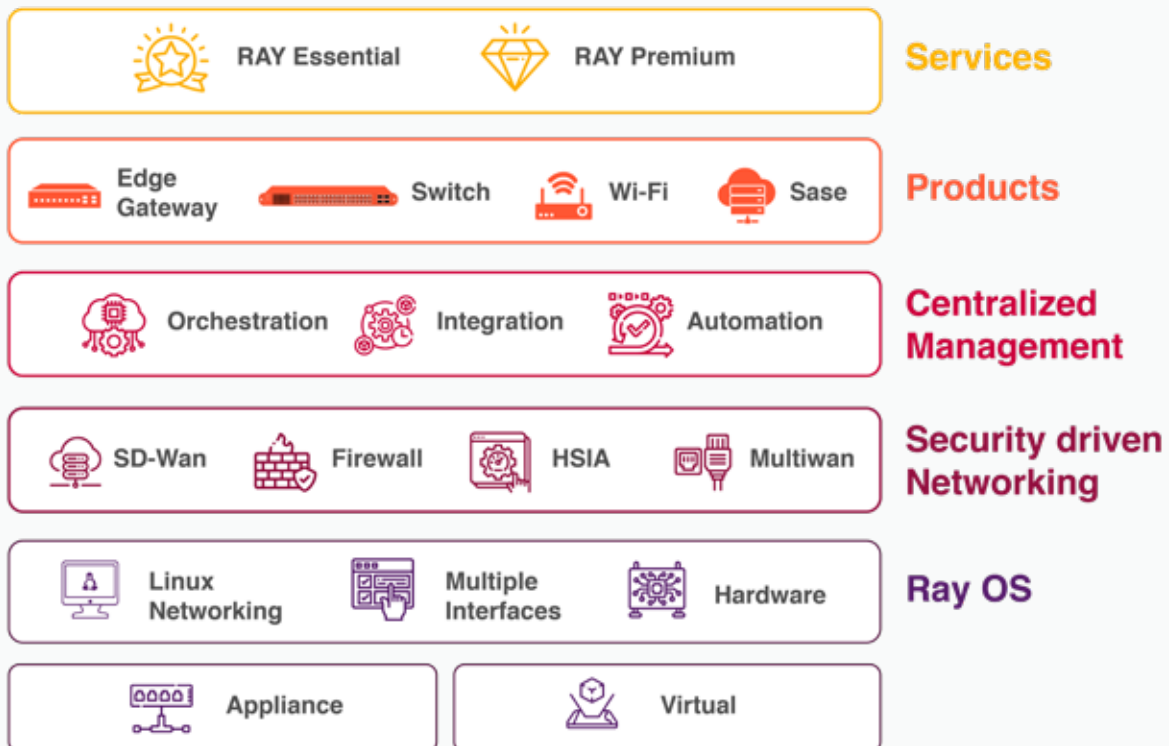

## Ray Lyte features

### Ray Lyte Cloud

Ray Lyte is entirely cloud-managed & has easy access from the device of your choice. You can now manage your network any time & anywhere. It gives you controlled access through a single pane of glass. Role-Based Admin Rights are a Unique Feature.

### Firewall & Segmentation

Ray Lyte Edge has an internet firewall that enables added protection against lateral movement between different parts of your network. Lyte Edge has a powerful segmentation. VLANs provide ways to separate levels of trust in your network.

### Wireless Range

Ensures internet coverage for different wireless devices such as smartphones, tablets, etc., connected to your network

### Captive Portal

Ray Edge has one of the most advanced Captive Portal systems with built-in Captive Portal. The Captive Portal itself can be configured with a step-by-step wizard to match the design aesthetics of the customer. The resulting captive portal is mobile friendly and responsive. The Captive Portals supported are Click to Login & Voucher.

### Security

Promotes the network security through WPA2/WPA3/OWE authentication for internet usage

### Firewall Security

Prevents unauthorized network access through firewall and getaway security.

### Multi-Site Management

You can systematically manage and maintain different networks, sites, deployment, etc.

### Increase Visibility & Efficiency

You can easily monitor and control all the connected and remove unauthorized users

### Enterprise Grade Wi-Fi

Quickly expands the network connectivity, delivering open Wi-Fi access to numerous users while switching APs.

### Smart Mesh

Create the mesh network in your location for network coverage extension in a few minutes.

### PPPoE & Static IP

You can authenticate through the ISP's PPPoE server and quickly deliver static IP to all the APs present in your location.

### Lower TCO

Increase agility and reduce costs for bandwidth by augmenting existing MPLS and leased line infrastructure with broadband, LTE, and other connection types. Off-load non-critical business apps to broadband as an alternative to MPLS. AIOps reduces problem identification and associated remediation costs; central management and control of network activity through Ray Platform eliminates the need to send out, trained technicians to assess issues and repair them

### Hierarchy/Cluster Management

Ray's Wireless Controller empowers efficient multi-site management. It enables hierarchical organization based on physical or logical locations, while offering role-based access control. Configuration changes at any level automatically apply to all sub-sites, ensuring consistent network settings. Its centralized dashboard provides a comprehensive view of all sites, and its flexible design allows for easy relocation of access points between sites with automatic setting updates.

### Dashboard & Analytics

Ray's single-pane-of-glass Dashboard and insightful Analytics empower you with comprehensive network control and understanding. The Dashboard allows for remote operation, quota, time, and speed assignments, providing essential insights into individual usage, whether for enterprise employees or family members. Complementing this, Ray's Analytics offers visually rich, actionable insights into your network's performance. It generates crucial business data to guide informed decisions, helping you optimize network efficiency and productivity.



## Dimensions & Interfaces

Canopus	
Wi-Fi Standards	802.11 ax/ac/b/g/n
WIRELESS	
AP Type	Outdoor Hardened, Wi-Fi 6 dual radio, 5 GHz 2x2 MIMO and 2.4 GHz 2x2 MIMO
MIMO	<ul style="list-style-type: none"> <li>2x2 SU-MIMO</li> <li>2x2 MU-MIMO</li> </ul>
802.11ax, 802.11ac Wave 2 and 802.11n Capabilities	<ul style="list-style-type: none"> <li>DL-OFDMA, UL-OFDMA, TWT support, BSS Coloring</li> <li>2 x 2 multiple input, multiple output (MIMO) with two spatial streams</li> <li>SU-MIMO, UL MU-MIMO** and DL MU-MIMO support</li> <li>Maximal ratio combining (MRC) &amp; beamforming</li> <li>20 and 40 MHz channels (802.11n); 20, 40, and 80 MHz channels (802.11ac Wave 2); 20, 40 and 80 MHz channels (802.11ax)</li> <li>Up to 1024-QAM on both 2.4 GHz &amp; 5 GHz bands</li> <li>Packet aggregation: A-MPDU, A-MSDU</li> </ul>
Radio 2.4GHz	Four spatial stream Single User (SU) MIMO for up to 600 Mbps wireless data rate with individual 4SS HE40 802.11ax client devices or with two 2SS HE40 802.11ax MU-MIMO capable client devices simultaneously
Radio 5GHz	Four spatial stream Single User (SU) MIMO for up to 2,400 Mbps wireless data rate with individual 4SS HE80 (or 2SS HE160) 802.11ax client devices, or with four 1SS or two 2SS HE80 802.11ax MU-MIMO capable client devices simultaneously
Max aggregate frame rate	<ul style="list-style-type: none"> <li>Max aggregate frame rate: 3.0 Gbps</li> <li>2.4GHz: 600 Mbps</li> <li>5GHz: 2400 Mbps</li> </ul>
Supported Data Rates (Mbps)	<ul style="list-style-type: none"> <li>802.11b: 1, 2, 5.5, 11</li> <li>802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54</li> <li>802.11n: 6.5 to 600 (MCS0 to MCS31, HT20 to HT40), 800 with 256-QAM</li> <li>802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4, VHT20 to VHT160), 2,166 with 1024-QAM</li> <li>802.11ax (2.4GHz): 3.6 to 1,147 (MCS0 to MCS11, NSS = 1 to 4, HE20 to HE40)</li> <li>802.11ax (5GHz): 3.6 to 2,402 (MCS0 to MCS11, NSS = 1 to 4, HE20 to HE160)</li> </ul>
Supported frequency bands	<ul style="list-style-type: none"> <li>Software enabled country-specific restrictions apply</li> <li>2.412-2.484 GHz</li> <li>5.150-5.250 GHz (UNII-1)</li> <li>5.250-5.350 GHz (UNII-2)</li> <li>5.470-5.600, 5.660-5.725 GHz (UNII-2e)</li> <li>5.725 -5.825 GHz (UNII-3)</li> </ul>
Supported Channels	<p>Available channels dependent on configured regulatory domain</p> <ul style="list-style-type: none"> <li>2.4GHz: 1-13</li> <li>5GHz: 36-64, 100-144, 149-165</li> </ul> <p>Dynamic frequency selection (DFS) optimizes the use of available RF spectrum</p>
Supported Radio Technologies	<ul style="list-style-type: none"> <li>802.11b: Direct-sequence spread-spectrum (DSSS)</li> <li>802.11a/g/n/ac: Orthogonal frequency-division multiplexing (OFDM)</li> <li>802.11ax: Orthogonal frequency-division multiple access (OFDMA) with up to 16 resource units (RU)</li> </ul>

Supported Modulation Types	<ul style="list-style-type: none"> <li>802.11b: BPSK, QPSK, CCK</li> <li>802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM</li> <li>802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</li> <li>802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QA</li> </ul>
Radio Chains and Spatial Streams	<p>2x2:2 streams SU/MU MIMO 5GHz</p> <p>2x2:2 streams SU/MU MIMO 2.4GHz</p>
Channelization/PHY Types	<ul style="list-style-type: none"> <li>802.11n high-throughput (HT) support: HT20/40</li> <li>802.11ac very high throughput (VHT) support: VHT20/40/80/160</li> <li>802.11ax high efficiency (HE) support: HE20/40/80/160</li> </ul>
Wireless Authentication	<ul style="list-style-type: none"> <li>WEP, WPA, WPA2-PSK, WPA3 - Personal, WPA3 - Enterprise, WPA3 - Enhanced Open (OWE)</li> <li>Dynamic PSK</li> <li>EAP-TLS, EAP-TTLS, EAP-MSCHAPv2, EAP-SIM</li> <li>IEEE 802.1X based Authentications</li> <li>MAC Whitelisting</li> <li>OTP based Authentication</li> </ul>
Advance Features	<ul style="list-style-type: none"> <li>Advanced Cellular Coexistence (ACC) minimizes interference from cellular networks</li> <li>Maximum ratio combining (MRC) for improved receiver performance</li> <li>Cyclic delay/shift diversity (CDD/CSD) to enable the use of multiple transmit antennas</li> <li>Short guard interval for 20-MHz, 40-MHz, and 80-MHz</li> <li>Space-time block coding (STBC) for increased range and improved reception</li> <li>Low-density parity check (LDPC) for high-efficiency error correction and increased throughput</li> <li>Transmit beam-forming (TxBF) for increased signal reliability and range</li> </ul>
Beamforming	Transmit Beamforming and Maximal Ratio Combining
Band Steering	Band steering for 5 GHz clients to connect over 5GHz Radio to provide better load balancing among 2.4GHz and 5GHz Radios.
Beaconing	<ul style="list-style-type: none"> <li>Transmit Only</li> <li>Transmit/Receive (Attached Devices)</li> <li>Transmit/Receive (Unattached Devices)</li> </ul>
Roaming/Mobility	<ul style="list-style-type: none"> <li>Support for IEEE 802.11r or Fast BSS Transition (FT)</li> <li>Centralized Layer 3 roaming</li> <li>Seamless Roaming for Captive Portal users</li> </ul>
Bluetooth	<ul style="list-style-type: none"> <li>BLE: up to 8dBm transmit power (class 1) and -99dBm receive sensitivity (125kbps)</li> </ul>
RADIO RESOURCE MANAGEMENT	
RF Management	Dynamic RF management to detect and mitigate interference from Wi-Fi
Wi-Fi Channel Management	Automatic Channel Selection by Intelligent Radio Resource Management (iRRM)
Wi-Fi Radio Power Management	Optimum Power management by Intelligent Radio Resource Management (iRRM)
Wi-Fi QOS	Self-healing (on detection of RF interference or loss of RF coverage).
Antenna	
4 dBi (Included in Box)	<p>2.4GHz omni-directional 4 dBi with 7 dBi peak gain</p> <p>5GHz omni-directional 4 dBi with 7 dBi peak gain</p>



RANGE/COVERAGE	
<b>Range/Coverage</b>	<ul style="list-style-type: none"> <li>› 250 Square Meters or 2500 Square Feet in ideal testing environment.</li> <li>› The range may vary as per the client environment, interference and obstruction.</li> </ul>
WIRELESS SECURITY	
<b>Wireless Security</b>	Real-time WIDS with instant alerting Classify Types of Rogue AP <ul style="list-style-type: none"> <li>› Evil Twin</li> <li>› Rouge AP</li> </ul>
MESH	
<b>SON based Mesh</b>	<ul style="list-style-type: none"> <li>› Self-configuring</li> <li>› Self-defending</li> <li>› Self-healing</li> <li>› Self-managing</li> </ul>
WI-FI OFFLOAD	
Passpoint Wi-Fi (Release 2) (Hotspot 2.0) for Seamless cellular-to-Wi-Fi Access Network Discovery and Selection Function (ANDSF) Integration	
RADIO MANAGEMENT	
<b>Antenna Optimization</b>	Polarization Diversity with Maximal Ratio Combining (PDMRC)
<b>Client Density Management</b>	Client Load Balancing distribute clients to the least loaded 802.11 channel and AP
<b>Airtime Fairness</b>	Enhance general client performance
POWER	
<b>Peak Transmit Power (Tx port/chain + Combining gain)</b>	<ul style="list-style-type: none"> <li>› Limited by local regulatory requirements</li> <li>› 2.4 GHz band: +26 dBm per chain, +26 dBm aggregate (2x2)</li> <li>› 5 GHz band: +26 dBm per chain, +26 dBm aggregate (2x2)</li> <li>› Note: conducted transmit power levels exclude antenna gain.</li> </ul>
<b>Transmit power</b>	Configurable in increments of 0.5 dBm
<b>Maximum EIRP (2.4 GHz band)</b>	<ul style="list-style-type: none"> <li>› Limited by local regulatory requirements</li> <li>› 2.4 GHz band:</li> <li>› 565: 29.2 dBm EIRP</li> <li>› 567: 33 dBm EIRP</li> </ul>
<b>Maximum EIRP (5 GHz band:)</b>	<ul style="list-style-type: none"> <li>› Limited by local regulatory requirements</li> <li>› 5 GHz band:</li> <li>› 565: 31.4 dBm EIRP</li> <li>› 567: 32.7 dBm EIRP</li> </ul>
NMS INTEGRATION	
SNMP support	
PERFORMANCE	
<b>Maximum number of associated client devices</b>	› Up to 50 active client devices per radio
<b>Maximum number of BSSIDs</b>	› 16 BSSIDs per radio › Up to 31 per AP
NETWORKING	
<b>IP</b>	IPv4, IPv6, dual stack
<b>VLAN</b>	<ul style="list-style-type: none"> <li>› 802.1Q (1 per BSSID or dynamic per user based on RADIUS)</li> <li>› VLAN Pooling</li> <li>› Port-based</li> </ul>
<b>802.1x</b>	Authenticator & Supplicant

<b>Tunnel</b>	<ul style="list-style-type: none"> <li>› L2TP</li> <li>› GRE/EoGRE</li> <li>› Openvpn</li> <li>› L2TP/IPSEC</li> </ul>
<b>Policy Management Tools</b>	Application Recognition and Control <ul style="list-style-type: none"> <li>› Access Control Lists</li> <li>› Device Fingerprinting</li> </ul>
<b>Quality of Service</b>	<ul style="list-style-type: none"> <li>› WMM Access Categories with DSCP and 802.1p support</li> <li>› QoS-based scheduling</li> <li>› Directed Multicast</li> <li>› L2/L3/L4 ACLs</li> </ul>
<b>Modes</b>	<ul style="list-style-type: none"> <li>› Gateway Mode</li> <li>› Bridge &amp; Firewall</li> <li>› Bridge No Firewall</li> </ul>
<b>External Authentication</b>	<ul style="list-style-type: none"> <li>› Authentication via Radius</li> <li>› Authentication via LDAP</li> <li>› Authentication via Single Sign-On (SSO)</li> <li>› Authentication via Active Directory (AD)</li> </ul>
<b>Radius</b>	› Radius Option 82 Support
<b>Tunnel</b>	<ul style="list-style-type: none"> <li>› L2TP</li> <li>› GRE/EoGRE</li> <li>› Openvpn</li> <li>› L2TP/IPSEC</li> <li>› PPTP</li> <li>› Wireguard/SSL</li> </ul>
<b>L3 Features</b>	Routing Protocols: <ul style="list-style-type: none"> <li>› Static unicast routes</li> <li>› Equal cost multipath routing (ECMP) RIP v1/v2</li> <li>› OSPF</li> <li>› BGP4+</li> </ul> VRRP Generic routing encapsulation (GRE) Standard 802.1d Spanning Tree Protocol Network Address Translation (NAT) Dynamic Host Configuration Protocol (DHCP) server, relay, and client Access control lists (ACLs) IPv4 and IPv6 Multicast NAT46 and NAT64 IPv4 and IPv6 Routing
GUEST CAPTIVE PORTAL	
<b>Guest Captive Portal Authentication Modes</b>	Click To Login Voucher
FIRMWARE	
Flash Security Updates (No Reboot Required)	
Cloud Managed Firmware Updates	
PHYSICAL INTERFACES	
<b>Ethernet (WAN)</b>	1x 100/1000/2.5G BASE-T Ethernet (RJ45) Power over Ethernet (802.3af/at) with Category 5/5e/6 cable PD. · LLDP Auto-sensing link speed and MDI/MDX 802.3az Energy Efficient Ethernet (EEE)
<b>Ethernet (LAN)</b>	1x 100/1000/2.5G Ethernet (RJ45) LLDP
<b>Reset Button</b>	Reset to the factory default settings

MOUNTING	
Mounts to walls and horizontal, vertical, and angled poles All standard mounting hardware included	
ENVIRONMENT	
Operating temperature	0°C to +50°C / +32°F to +122°F
Humidity	5%~95% non-condensing Internal
Storage Temperature	-20 °C to 55 °C
Storage Humidity	5%~95% non-condensing Internal
POWER	
Maximum (worst case) power consumption:	16.5W
Maximum (worst case) power consumption in idle mode:	6.1W
Maximum (worst case) power consumption in deep-sleep mode:	3.3W
802.3at PoE+	Power sources sold separately 16.5W
Power over Ethernet (PoE+):	› 802.3at-compliant
SURGE PROTECTION	
Common Mode Surge Protection	6KV
Differential Mode Surge Protection	2KV
RELIABILITY	
Mean Time Between Failure (MTBF): 1,315,612 hrs at +25°C operating temperature	



CONTROLLER	
Public Cloud	Ray ONE hosted on Public Cloud
Private Cloud	Ray ONE hosted on Private Cloud/Datacenter
REGULATORY COMPLIANCE	
CE Marked For more country-specific regulatory information and approvals, please see your Ray representative.	
WARRANTY	
2 Years Essential Warranty	
BOX CONTENTS	
› Standard Mounting Kit › Ethernet Cable › Quick Start Guide	



## RF PERFORMANCE TABLE

Band, rate	Maximum transmit power (dBm) per transmit chain	Receiver sensitivity (dBm) per receive chain
<b>2.4 GHz, 802.11b</b>		
1 Mbps	22	-97
1 Mbps	22	-89
<b>2.4 GHz, 802.11g</b>		
6 Mbps	22	-93
54 Mbps	20	-76
<b>2.4 GHz, 802.11n/ac HT20</b>		
MCS0	22	-93
MCS8	19	-75
<b>2.4 GHz, 802.11ax HE20</b>		
MCS0	22	-93
MCS11	17	-62
<b>5 GHz, 802.11a</b>		
6 Mbps	22	-92
54 Mbps	20	-75
<b>5 GHz, 802.11n/ac HT20/VHT20</b>		
MCS0	22	-92
MCS8	19	-72
<b>5 GHz, 802.11n/ac HT40/VHT40</b>		
MCS0	22	-90
MCS9	19	-65
<b>5 GHz, 802.11ac VHT80</b>		
MCS0	22	-88
MCS9	19	-63
<b>5 GHz, 802.11ax HE20</b>		
MCS0	22	-94
MCS11	17	-62
<b>5 GHz, 802.11ax HE40</b>		
MCS0	22	-91
MCS11	17	-60
<b>5 GHz, 802.11ax HE80</b>		
MCS0	22	-87
MCS11	17	-57



## Subscriptions

### ESSENTIAL

Cloud Subscription	Essential Support	L3 Networking	RRM	WAN Suite
--------------------	-------------------	---------------	-----	-----------

### Duration

Limited Lifetime
------------------

### Hardware Warranty :

#### Essential Hardware Warranty

2 Years
---------

### Software Support :

#### Essential Software

#### Limited Lifetime

Support Time	8*5
--------------	-----

Web Support	180 days from day of activation
-------------	---------------------------------

For More details on warranty visit: [www.raylyte.com](http://www.raylyte.com)

## Ordering Mechanism

### Ray Lyte Canopus Hardware

SKU	Product Name	Description
RWHCC0N279	Ray Lyte Canopus	Wi-Fi 6 (802.11 AX) Outdoor Wireless Access Point 3000 Mbps 2x2 MIMO 1 x 2.5G (WAN, PoE+) 1 x 1G (LAN)

### Ray Lyte Canopus Hardware Warranty

RWWESC4N285	Canopus Essential Hardware Warranty (12 Months)	Canopus Essential Hardware Warranty Return & Replace Hardware Warranty
-------------	---	---

### Ray Lyte Canopus Subscription

RWSSC8N280	Ray Lyte Canopus Essential Subscription Limited Lifetime	Ray Lyte Canopus Essential Limited Lifetime Subscription Includes Cloud Subscription Essential Support L3 Networking RRM
------------	--	---

# Use Cases

## ▼ Corporate Offices



## ▼ Restaurants/Hotels



## ▲ Educational Institutions



## ▲ Hospitals

**Ray Pte. Ltd.**

[www.raylyte.com](http://www.raylyte.com) | [support@raylyte.com](mailto:support@raylyte.com)

Suite #09-01, 20 Collyer Quay, Singapore 049319



© Copyright 2023 Ray Pte. Ltd. All Rights reserved. Ray, Ray.life and the Ray logo are trademarks of Ray Pte. Ltd. in Singapore, India and other countries. This product is protected by Singapore and international copyright and intellectual property laws. The information contained herein is subject to change without notice. The only warranties for Ray Pte. Ltd. products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Ray Pte. Ltd. shall not be liable for technical or editorial errors or omissions contained herein.